



Available in 3, 6, 8, 12 and 21 round models with swing bolt closures are a proven design suited for high purity beverage, chemical and pharmaceutical applications. Manufactured in **316L Stainless Steel** with a **25 RA internal finish**.

All CSH housings are standard with 2-226 style cartridge adaptors giving a positive locking tab seal. Allows flexibility in one housing to use different cartridge lengths and maximise filter performance and cost.

Designed with a removable tube sheet for maximum cleaning and sanitary performance.

Each housing has no internal threaded parts that come in contact with process fluid and is standard with food grade silicon gaskets.

1" sanitary gauge port tops with 1/2" sanitary vent and drain ferrules are standard features. Each vent and drain port are standard with solid cap, silicon gasket and clamp.

Maximum Operating Parameters

Maximum Pressure: 150 PSI (10 bar)

Maximum Operating Temperature: 230°F (110°C)

Standard Specifications

This is to give you an overview of our standard product, please see options on reverse with ordering information.

Model	Number Round	Length of Cartridge	Inlet / Outlet	Drains	Gauge Port With Vent	Max Ctg Diameter	Gaskets	Mounting Legs	Cartridge Seal 2-226 / Tabs
CSH32	3	20"	2" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes
CSH33	3	30"	2" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes
CSH34	3	40"	2" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes
CSH63	6	30"	2" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes
CSH64	6	40"	2" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes
CSH83	8	30"	2" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes
CSH84	8	40"	2" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes
CSH123	12	30"	3" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes
CSH124	12	40"	3" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes
CSH213	21	30"	4" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes
CSH214	21	40"	4" TC	1/2" TC	1" TC / 1/2" TC	2 3/4"	Silicone	Yes	Yes

Vent & Drain Twist Valve Option



Hold Down Plate / Removable Tube Sheet




Total Performance



Ordering Information

The housing catalogue number is made up of several variable characters i.e. number round, length, cartridge style, gasket material and others below. For example: a 3 round, 30" length, swing bolt closure, 316L SS, 2-226 seal, 2" ferrules, welded legs, 25 RA internal finish with Silicon gasket would be designated as: CSH33S6B21AS

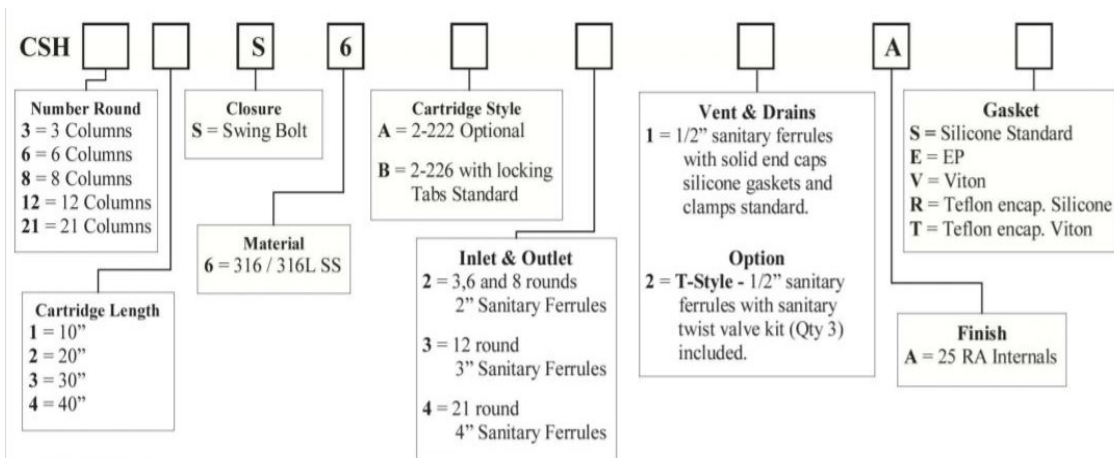

Note:

Please contact Critical Process Filtration for other options or special requirements.

(Dimensions) Complete and detailed line drawings are available upon request. Please contact Critical Process Filtration with the model number and specifications you require.

Filtrex Technology Pte Ltd

* 4009 Ang Mo Kio Ave 10, #04-37 TECHplace 1, Singapore 569738

| +65 6456 2388 | 7 : +65 6456 8266

Email : info@filtrex-tech.com | Website : www.filtrex-tech.com